LISEC Super Spacer – Standard Window Line #2

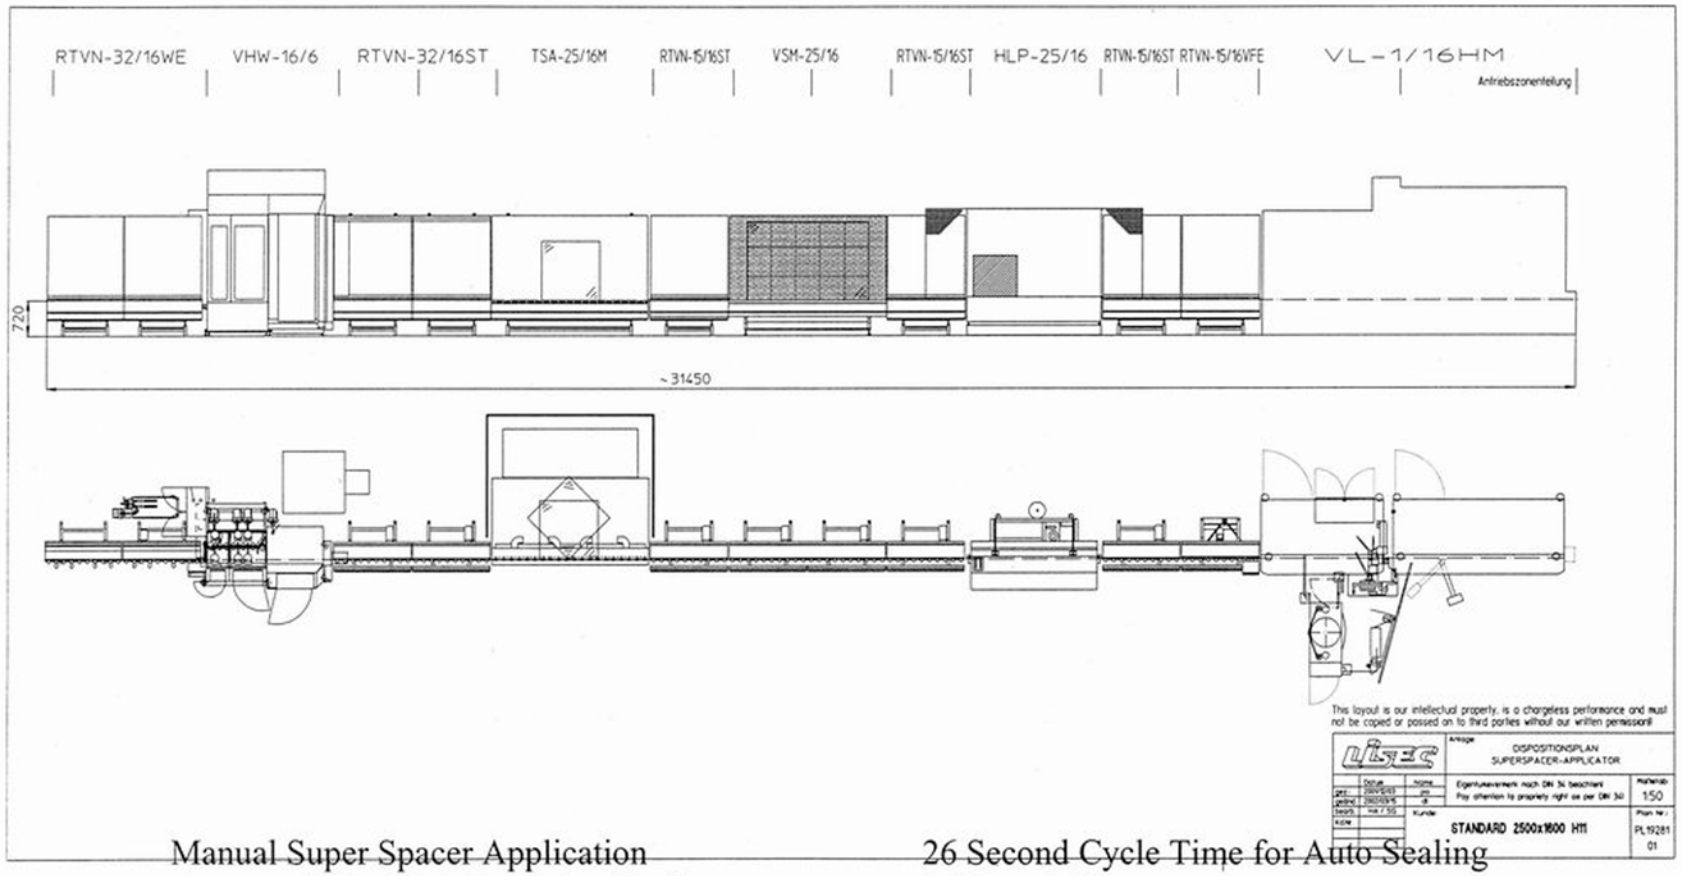

Manual Super Spacer Application
Automatic Hot Melt Butyl Application

26 Second Cycle Time for Auto Sealing
3 Direct Labor

Equipment layout, specifications and staffing are dependent on customer requirements and subject to change. Cycle times based on a standard ½" x 24"x 36" IG unit. Direct Labor does not include grid application if required nor material supply and material changes to the equipment.